


## LSQ2222AR22\_



## 外观&amp;形状

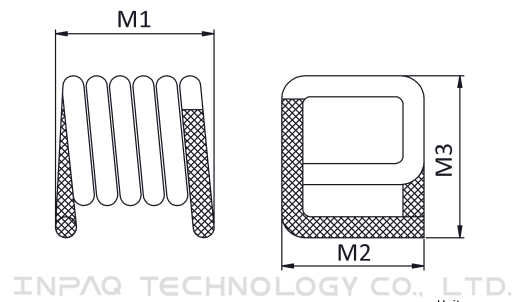

| Series       | M1          | M2         | M3         |
|--------------|-------------|------------|------------|
| LSQ2222A90N□ | 5.21±0.381  | 5.46±0.254 | 5.69±0.254 |
| LSQ2222AR11□ | 6.35±0.381  | 5.59±0.254 | 5.69±0.254 |
| LSQ2222AR13□ | 6.73±0.381  | 5.59±0.254 | 5.69±0.254 |
| LSQ2222AR16□ | 7.37±0.381  | 5.59±0.254 | 5.69±0.254 |
| LSQ2222AR18□ | 8.13±0.381  | 5.59±0.254 | 5.69±0.254 |
| LSQ2222AR22□ | 9.91±0.381  | 5.59±0.254 | 5.69±0.254 |
| LSQ2222AR27□ | 11.68±0.381 | 5.59±0.254 | 5.69±0.254 |
| LSQ2222AR30□ | 11.94±0.381 | 5.72±0.254 | 5.69±0.254 |

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## 规格

|             |               |
|-------------|---------------|
| 長(公釐)       | 9.91±0.381    |
| 寬(公釐)       | 5.46±0.254    |
| 高(公釐)       | 5.69±0.254    |
| 感值(nH)      | 220           |
| 公差          | G(±2%),J(±5%) |
| 測試頻率(MHz)   | 50            |
| 最大值直流阻抗(mΩ) | 11            |
| 最大溫升電流(A)   | 5             |
| 品質因素        | 140           |
| 自我諧振頻率[MHz] | 1000          |
| 操作溫度℃       | -25~+125      |

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## 特点

- 1.1. Exceptionally high Q.
- 1.2. Handles up to 5.7 Amps current.
- 1.3. Flat top and bottom for reliable pick and place and mechanical stability.
- 1.4. Solder coated leads ensure excellent solderability.

## 包装讯息

| 包裝尺寸(Inch) | 載帶           | 標準包裝(KPCS) | 單重(gram) | 濕敏等級 |
|------------|--------------|------------|----------|------|
| 13         | Plastic type | 0.75       | 0.066    | 1    |

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/3

- 1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
- 2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。