
All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

MCB3216S202EBE

General ROHS HF

外观&形状



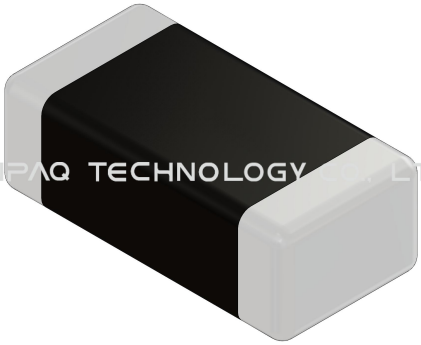



L	3.20±0.20
W	1.60±0.20
T	1.10±0.20
E	0.50±0.30

(unit:mm)

INPAQ TECHNOLOGY CO., LTD.
INPAQ TECHNOLOGY CO., LTD.

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

规格

長(公釐)	3.2±0.20
寬(公釐)	1.6±0.20
高(公釐)	1.1±0.20
尺寸代碼 英吋(公釐)	1206(3216)
阻抗值(Ω)	2000
公差(%)	±25
測試頻率(MHz)	30
最大值直流阻抗(Ω)	0.5
最大值溫升電流 at 85℃(mA)	200
操作溫度 ℃	-55~+125

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

特点

●Monolithic inorganic material construction

●Closed magnetic circuit avoids crosstalk

●SMD Type & suitable for reflow and wave soldering

●Available in various sizes

●Excellent solderability and heat resistance

●High reliability

●Effectively filtering capability over a wide range of frequency


包装讯息

包装尺寸(Inch)	包装類型	標準包裝(PCS)	單重(gram)	濕敏等級
7	Plastic type	3000	0.0271	1

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

特性曲线

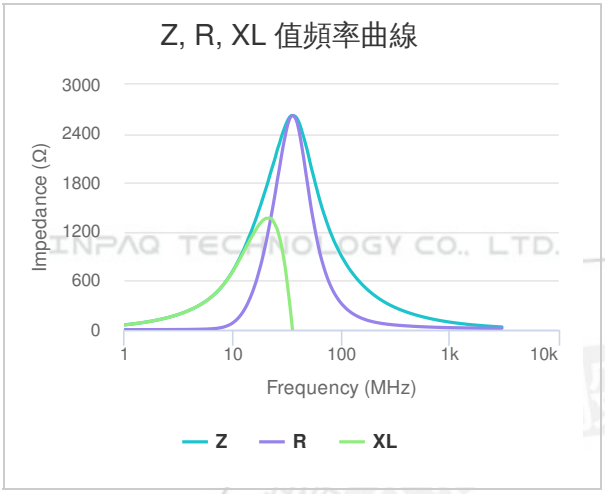

INPAQ TECHNOLOGY CO., LTD.
PASSIVE SYSTEM ALLIANCE
COPYRIGHT© INPAQ TECHNOLOGY CO., LTD ALL RIGHT RESERVED.

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。