


LSQ2222AR13_



外观&形状

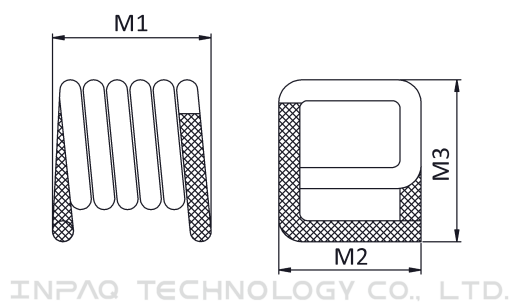

Unit:mm

Series	M1	M2	M3
LQA2222A90N□	5.21±0.381	5.46±0.254	5.69±0.254
LQA2222AR11□	6.35±0.381	5.59±0.254	5.69±0.254
LQA2222AR13□	6.73±0.381	5.59±0.254	5.69±0.254
LQA2222AR16□	7.37±0.381	5.59±0.254	5.69±0.254
LQA2222AR18□	8.13±0.381	5.59±0.254	5.69±0.254
LQA2222AR22□	9.91±0.381	5.59±0.254	5.69±0.254
LQA2222AR27□	11.68±0.381	5.59±0.254	5.69±0.254
LQA2222AR30□	11.94±0.381	5.72±0.254	5.69±0.254

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

 规格

長(公釐)	6.73±0.381
寬(公釐)	5.46±0.254
高(公釐)	5.69±0.254
感值(nH)	130
公差	G(±2%),J(±5%)
測試頻率(MHz)	50
最大值直流阻抗(mΩ)	7.5
最大溫升電流(A)	5.4
品質因素	140
自我諧振頻率[MHz]	1000
操作溫度°C	-40~+125

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

特点

- 1.1. Exceptionally high Q.
- 1.2. Handles up to 5.7 Amps current.
- 1.3. Flat top and bottom for reliable pick and place and mechanical stability.
- 1.4. Solder coated leads ensure excellent solderability.
- 1.5. High reliability tests comply with AEC-Q200.

包装讯息

包装尺寸(Inch)	載帶	標準包裝(KPCS)	單重t(gram)	濕敏等級
13	Plastic type	0.75	0.066	1

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/3

- 1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
- 2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。