



MLVS0806HV271

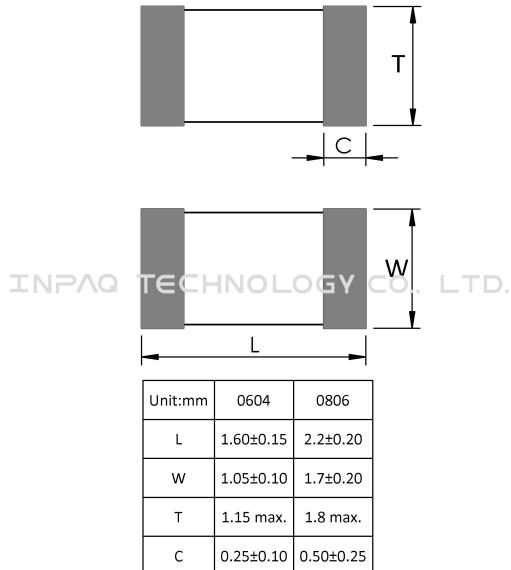

外观&形状

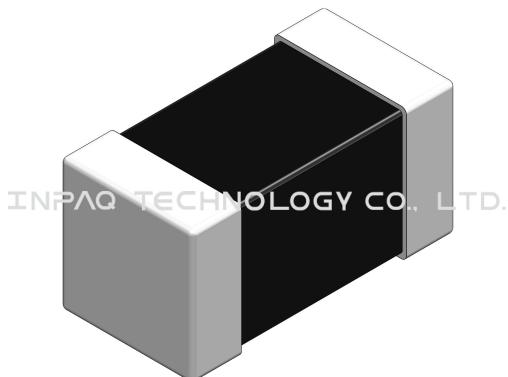

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Page 1/3

6 规格

長(公釐)	2.2
寬(公釐)	1.7
高(公釐)	1.8 max
尺寸代碼 英吋(公釐)	0806 (2016)
工作電壓(V)	175
工作電壓(V)	225
崩潰電壓(V)	243
崩潰電壓(V)	297
箝制電壓(A)	1
箝制電壓(V)	390
電容(KHZ)	1
電容(pF)	100
突波電流(A)	100

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

6 特點

VV – Voltage across the device measured at 1mA DC current.

Equivalent to V_b, “Breakdown Voltage”.

Vc – Maximum peak voltage across the varistor measured at 8/20us waveform and 1A pulse current

I_L – Leakage current at Vv × 80%

C_p – Device capacitance measured with zero volt bias 1Vrms.

i_{max} – Maximum peak current which may be applied with 8/20us waveform without device failure.

8/20us(1 time)* : Calibration method by short circuit

8/20us(15 times) # : Calibration method by UL standard

6 包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重(gram)	濕敏等級
7	Plastic type	2	0.0285	1