


LSQ2222AR22_



Appearance & Shape

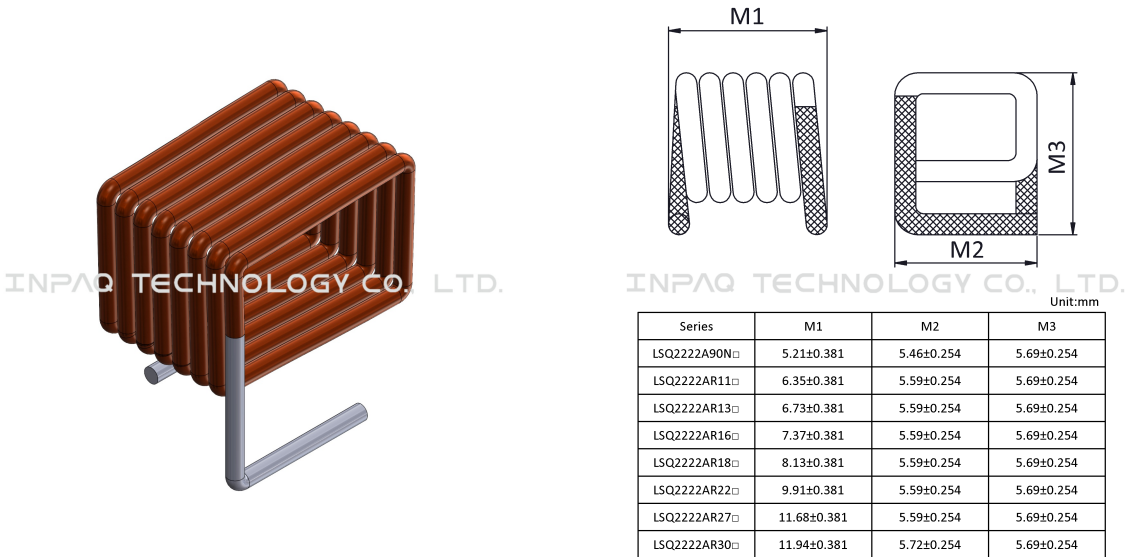

注意 NOTICE: All Specifications are subject to change without notice.

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。

2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Specification

L size(mm)	9.91±0.381
W size(mm)	5.46±0.254
T size(mm)	5.69±0.254
Inductance(nH)	220
Tolerance	G(±2%),J(±5%)
Test Frequency(MHz)	50
DCR(mΩ) Max.	11
Irms(A) Max.	5
Q Value (Min.)	140
SRF[MHz]Min.	1000
OperatingTemperature range(including self-temperature rising) °C	-25~+125

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Notices

- 1.1. Exceptionally high Q.
- 1.2. Handles up to 5.7 Amps current.
- 1.3. Flat top and bottom for reliable pick and place and mechanical stability.
- 1.4. Solder coated leads ensure excellent solderability.

Packing

Packing Reel(Inch)	Carrier Tape	Standard package quantity(KPCS)	Piece weight(gram)	MSL Level
13	Plastic type	0.75	0.066	1

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。