

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.


MHC2012S221NBP

General ROHS HF

Appearance & Shape

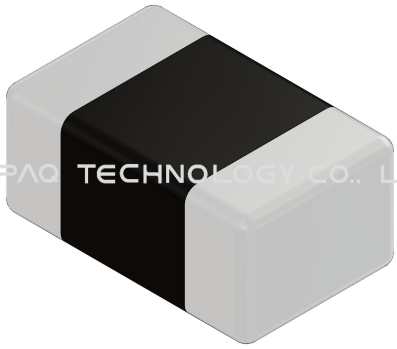

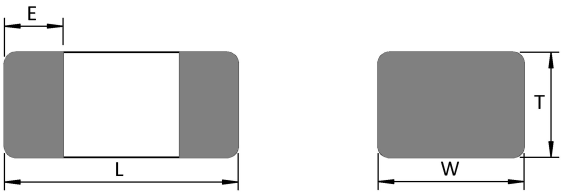



L	2.00±0.20
W	1.25±0.20
T	0.90±0.20
E	0.50±0.30

(unit:mm)

© INPAQ TECHNOLOGY CO., LTD ALL RIGHT

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

Specification

L size(mm)	2.0±0.20
W size(mm)	1.25±0.20
T size(mm)	0.9±0.20
Size code Inch(mm)	0805(2012)
Impedance(Ω)	220
Tolerance(%)	±25
Test Frequency(MHz)	100
DCR(Ω) Max.	0.09
Irms(mA) @85℃ (Max.)	2000
Operating Temperaturerange(includingself-temperaturerising) ℃	-55~+125

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

Notices

●Combination of high frequency noise suppression with capability of handing high current

●The current rating up to 6 Amps with low DCR

Packing


Packing Reel(Inch)	Packaging type	Standard package quantity(PCS)	Piece weight(gram)	MSL Level
7	Paper type	4000	0.0095	1

COPYRIGHT© INPAQ TECHNOLOGY CO., LTD ALL RIGHT RESERVED.
PSA PASSIVE SYSTEM ALLIANCE

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

Characteristic curve

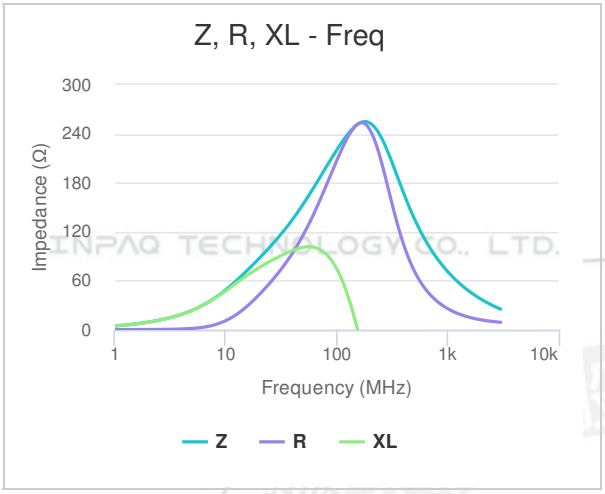

INPAQ TECHNOLOGY CO., LTD.
PASSIVE SYSTEM ALLIANCE
COPYRIGHT© INPAQ TECHNOLOGY CO., LTD ALL RIGHT RESERVED.

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。