




# MCM1012W900F06BP

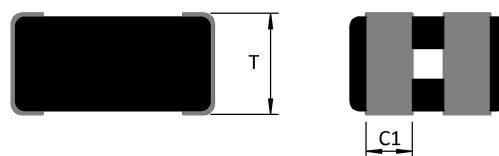

## Appearance & Shape

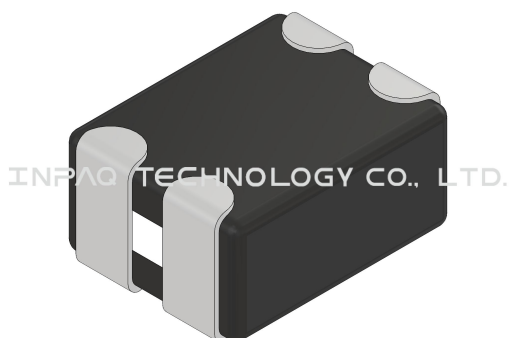

|    |           |
|----|-----------|
| L  | 1.25±0.10 |
| W  | 1.00±0.10 |
| T  | 0.60±0.10 |
| P  | 0.50±0.10 |
| C1 | 0.30±0.10 |
| C2 | 0.20±0.15 |

(unit:mm)

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Specification

|                                                                   |            |
|-------------------------------------------------------------------|------------|
| L size(mm)                                                        | 1.25±0.10  |
| W size(mm)                                                        | 1.00±0.10  |
| T size(mm)                                                        | 0.60±0.10  |
| Size codeinch (mm)                                                | 0504(1210) |
| Impedance(Ω)                                                      | 90         |
| Tolerance(%)                                                      | ±25        |
| Test Frequency(MHz)                                               | 100        |
| DCR(Ω) Max.                                                       | 0.6        |
| I <sub>rms</sub> (mA) Max.                                        | 300        |
| Rated Voltage(V)                                                  | 10         |
| Withstand Voltage(V)                                              | 25         |
| Insulation Resistance (MΩ) Min.                                   | 200        |
| Operating Temperature range(including self-temperature rising) °C | -55~+125   |

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Notices

- Powerful components with composite co-fired material to solve EMI problem for high speed differential signal transmission line as USB, and LVDS, without distortion to high speed signal transmission.

## Packing


| Packing Reel(Inch) | Packaging type | Standard package quantity(PCS) | Piece weight(gram) | MSL Level |
|--------------------|----------------|--------------------------------|--------------------|-----------|
| 7                  | Paper type     | 4000                           | 0.0036             | 1         |

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Characteristic curve

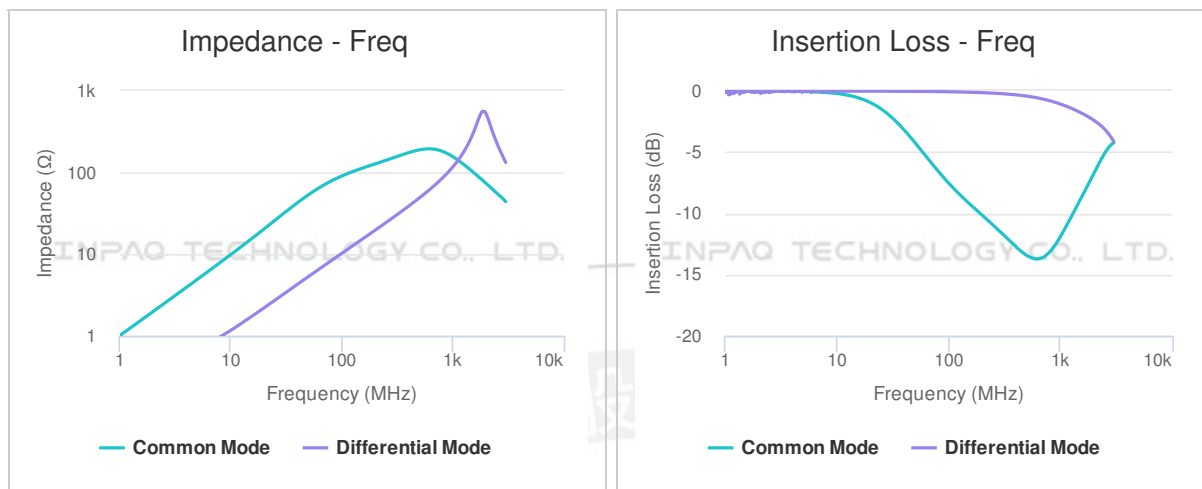

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。