



# SMA6FJ43CA-M

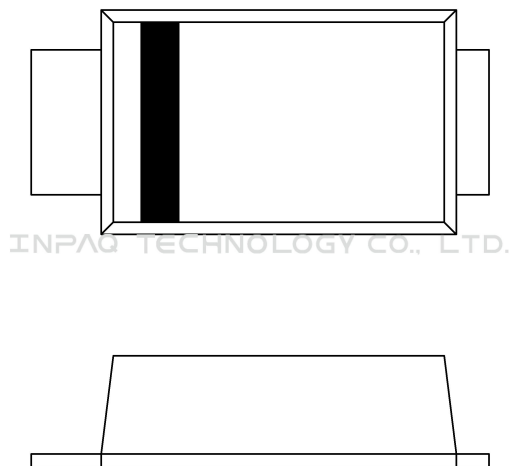

## Appearance & Shape

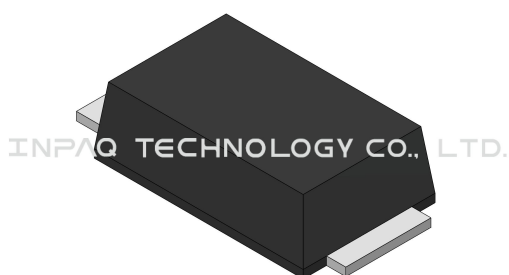

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Specification

|                      |                 |
|----------------------|-----------------|
| L size(mm)           | 5.4             |
| W size(mm)           | 2.7             |
| T size(mm)           | 1.8             |
| Size code(Inch (mm)) | SMAF / DO-214AC |
| Direction Bi/Uni     | Uni Direction   |
| Channel              | 1               |
| VRWM (V) Max         | 43              |
| VB(V) Typical        | 47.8            |
| VB(V) Max            | 52.8            |
| Ipp (A)              | 8.6             |
| Ppp (W)              | 600             |

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Notices

Glass passivated chip junction

Reliable low cost construction utilizing molded plastic technique

Excellent clamping voltage capability

Fast response time

## Packing

| Packing Reel (Inch) | Carrier tape | Standard package quantity (KPCS) | Piece weight (gram) | MSL Level |
|---------------------|--------------|----------------------------------|---------------------|-----------|
| 7                   | Plastic type | 2                                | 0.04                | 1         |

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。

2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。