


# CES10402V24B0



## Appearance & Shape

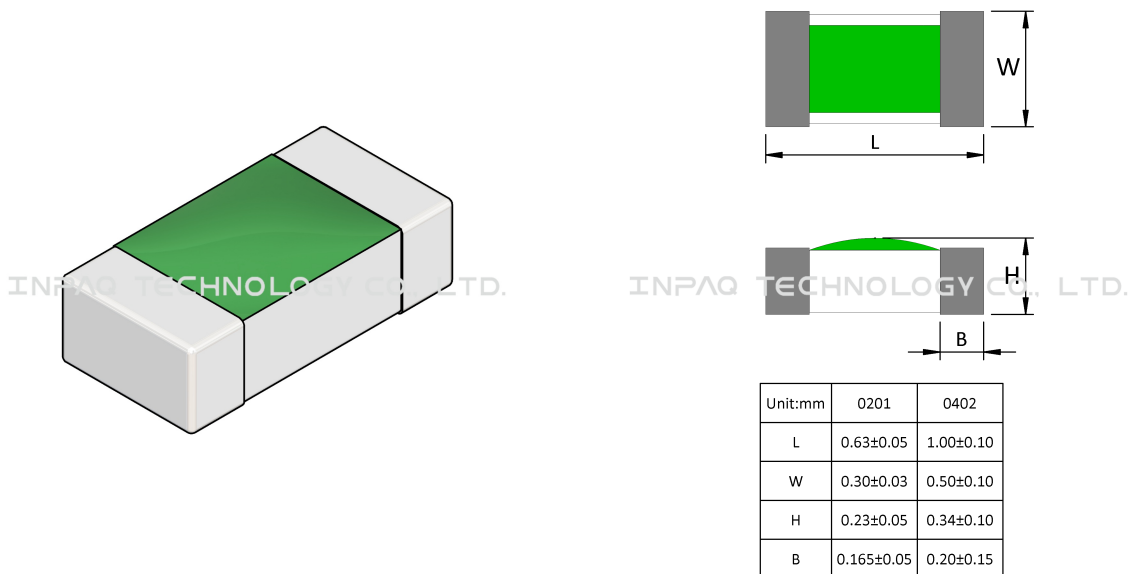

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Specification

|                                |             |
|--------------------------------|-------------|
| L size(mm)                     | 1           |
| W size(mm)                     | 0.5         |
| T size(mm)                     | 0.34        |
| Size codeInch (mm)             | 0402 (1005) |
| VRMS (V) max                   | 24          |
| IL (A) TYP                     | 0.01        |
| Vt (V) TYP                     | 300         |
| Vc (V) TYP                     | 30          |
| Cp Condition (KHZ)             | 1           |
| CP (pF) TYP                    | 0.1         |
| ESD Contact discharge (kV) TYP | 8           |
| ESD Air discharge (kV) TYP     | 15          |
| ESD pulse withstand (pulses)   | 1000        |

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Notices

Vt – measurement by using Transmission Line Pulse (TLP)

Vc – measurement by using Transmission Line Pulse (TLP)

Cp – Device capacitance measured with 1Vrms

## Packing


| Packing Reel (Inch) | Carrier tape | Standard package quantity (KPCS) | Piece weight (gram) | MSL Level |
|---------------------|--------------|----------------------------------|---------------------|-----------|
| 7                   | Paper type   | 10                               | 0.00075             | 1         |

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Characteristic curve

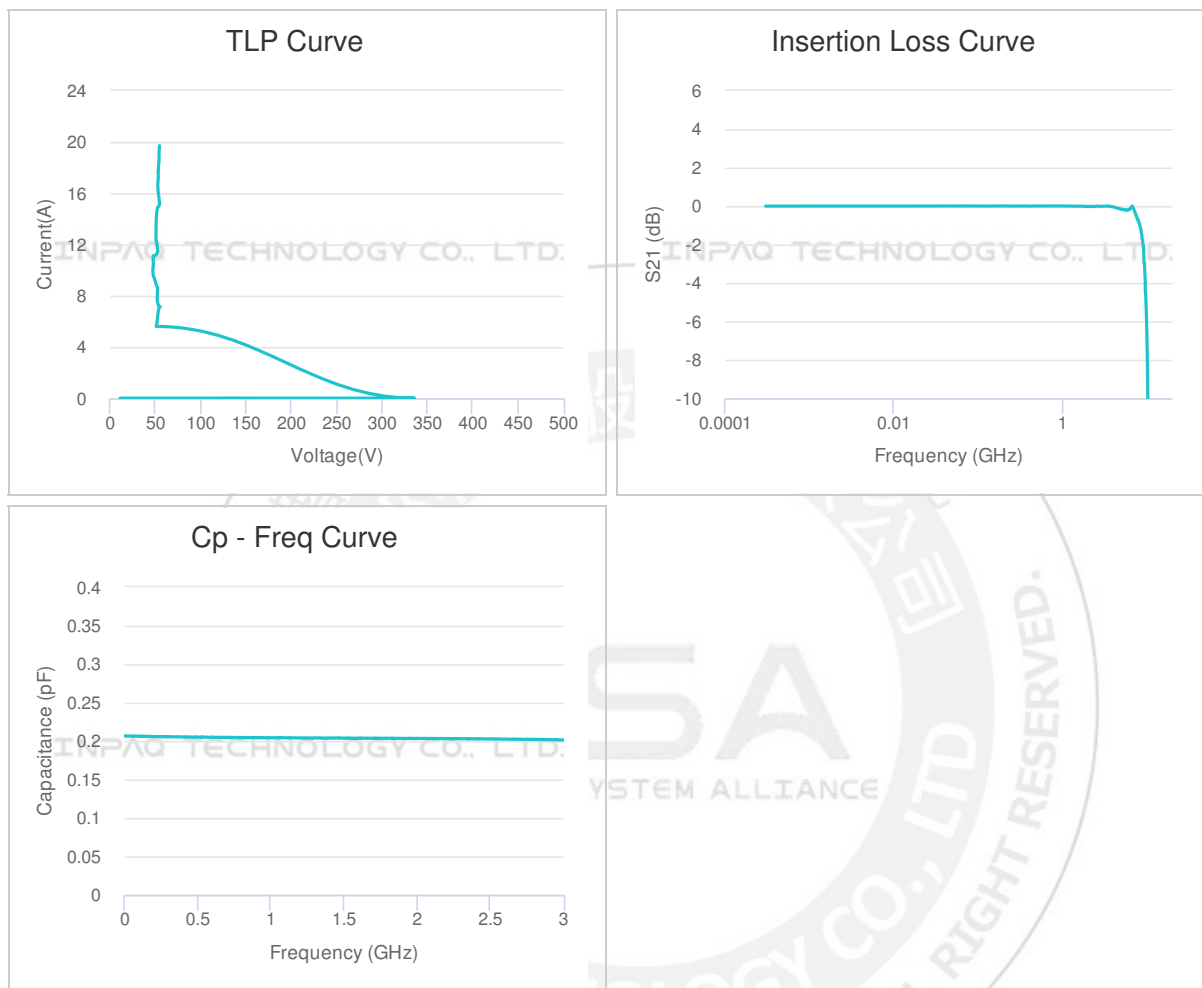

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。