

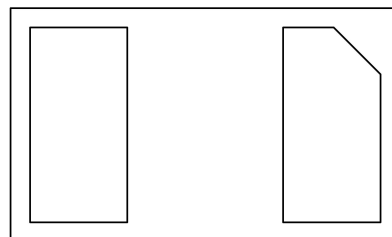


TVM12VU1-FBP1006-2L

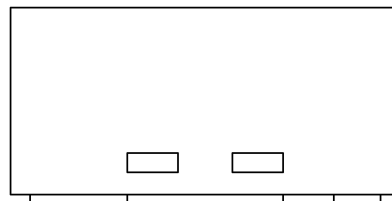

Appearance & Shape

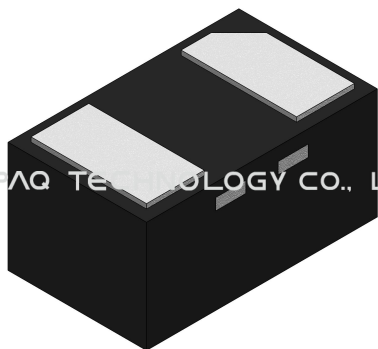

INPAQ TECHNOLOGY CO., LTD.

INPAQ TECHNOLOGY CO., LTD.



注意 NOTICE: All Specifications are subject to change without notice.

Page 1/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Specification

L size(mm)	1
W size(mm)	0.6
T size(mm)	0.5
Size code(Inch (mm))	DFN1006
Direction Bi/Uni	Uni Direction
Channel	1
VRWM (V) Max	12
Cp (pF) Typical	48
Cp (pF) Max	70
Ipp (A)	9
ESD Contact Discharge (V)	15
ESD Air Discharge (V)	20

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Notices

Transient protection of one line

- Computers and peripherals
- Mobile phone and accessories
- Other electronics equipments communication systems

Packing


Packing Reel (Inch)	Carrier tape	Standard package quantity (KPCS)	Piece weight (gram)	MSL Level
7	Plastic type	10	0.00077	1

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Characteristic curve

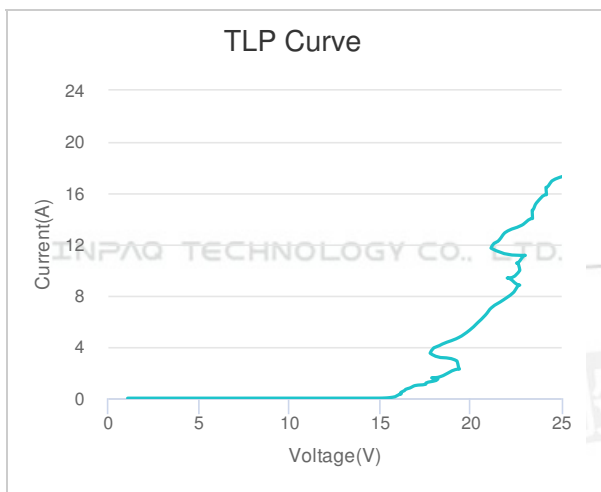

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。