

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.


MHC4532S132QBE

General ROHS HF

Appearance & Shape



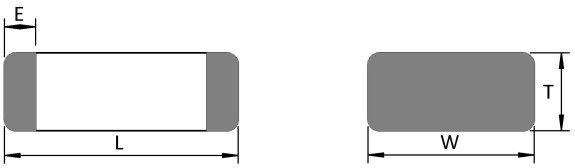



L	4.50±0.25
W	3.20±0.25
T	1.50±0.25
E	0.60±0.40

(unit:mm)

INPAQ TECHNOLOGY CO., LTD.
INPAQ TECHNOLOGY CO., LTD.

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

Specification

L size(mm)	4.5±0.25
W size(mm)	3.2±0.25
T size(mm)	1.5±0.25
Size code Inch(mm)	1812(4532)
Impedance(Ω)	1300
Tolerance(%)	±25
Test Frequency(MHz)	60
DCR(Ω) Max.	0.04
Irms(mA) @85℃ (Max.)	3000
Operating Temperaturerange(includingself-temperaturerising) ℃	-55~+125

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

Notices

●Combination of high frequency noise suppression with capability of handing high current

●The current rating up to 6 Amps with low DCR

Packing


Packing Reel(Inch)	Packaging type	Standard package quantity(PCS)	Piece weight(gram)	MSL Level
7	Plastic type	1000	0.1125	1

COPYRIGHT© INPAQ TECHNOLOGY CO., LTD ALL RIGHT RESERVED.
PSA PASSIVE SYSTEM ALLIANCE

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

Characteristic curve

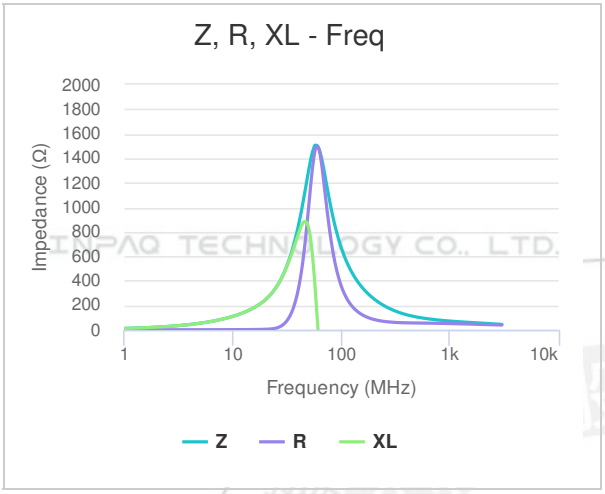

INPAQ TECHNOLOGY CO., LTD.
PASSIVE SYSTEM ALLIANCE
COPYRIGHT© INPAQ TECHNOLOGY CO., LTD ALL RIGHT RESERVED.

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。