




# MHC2012S601NHP

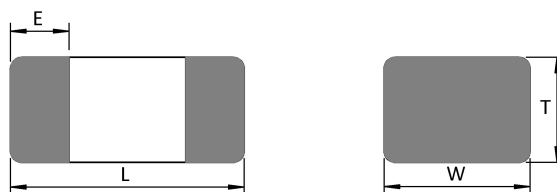

## Appearance & Shape

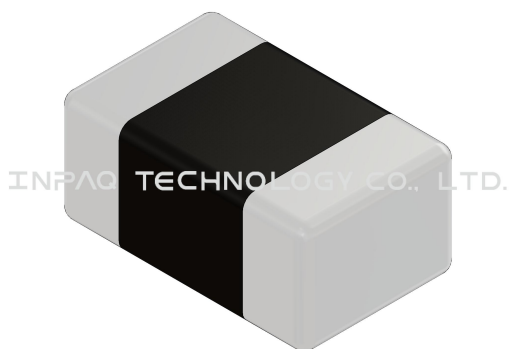

INPAQ TECHNOLOGY CO., LTD.



L	2.00±0.20
W	1.25±0.20
T	0.90±0.20
E	0.50±0.30

(unit:mm)




注意 NOTICE: All Specifications are subject to change without notice.

Page 1/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Specification

L size(mm)	2.0±0.20
W size(mm)	1.25±0.20
T size(mm)	0.9±0.20
Size code Inch(mm)	0805(2012)
Impedance(Ω)	600
Tolerance(%)	±25
Test Frequency(MHz)	100
DCR(Ω) Max.	0.09
I <sub>rms</sub> (mA) @85°C (Max.)	2000
I <sub>rms</sub> (mA) @125°C (Max.)	1000
Operating Temperature range(including self-temperature rising) °C	-55~+125

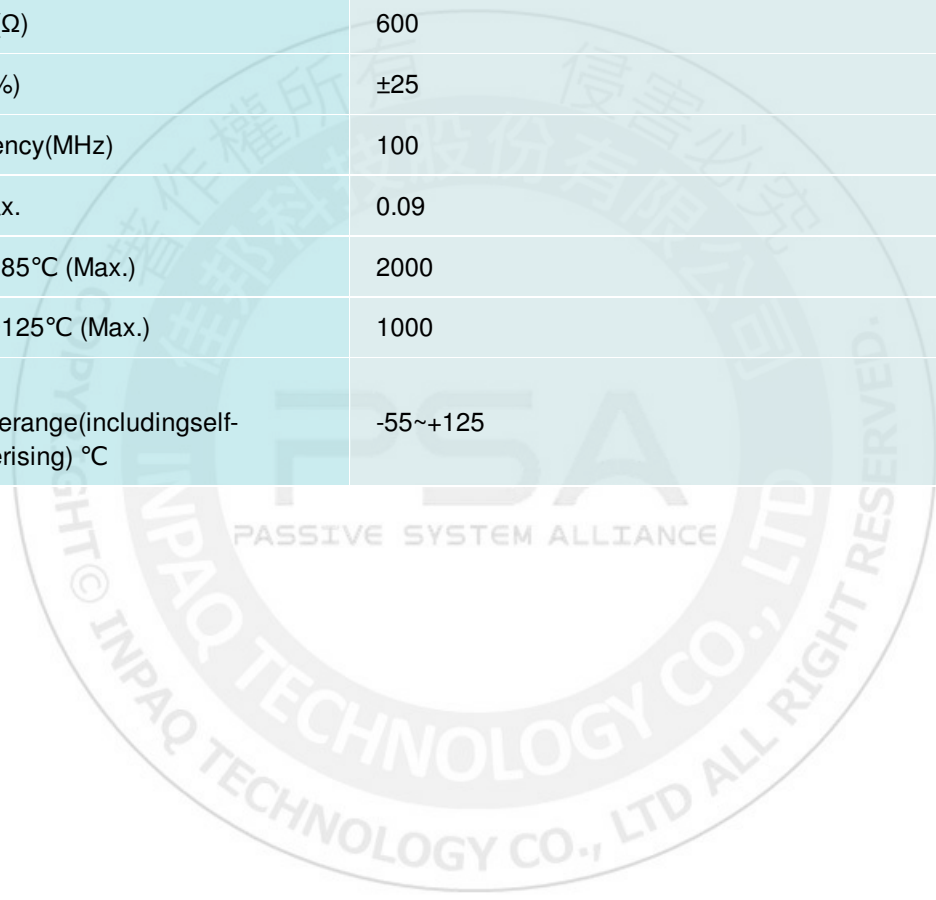

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Notices

- Combination of high frequency noise suppression with capability of handing high current
- The current rating up to 6 Amps with low DCR
- Compliant with AEC Q200

## Packing



Packing Reel(Inch)	Packaging type	Standard package quantity(PCS)	Piece weight(gram)	MSL Level
7	Paper type	4000	0.0095	1

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Characteristic curve

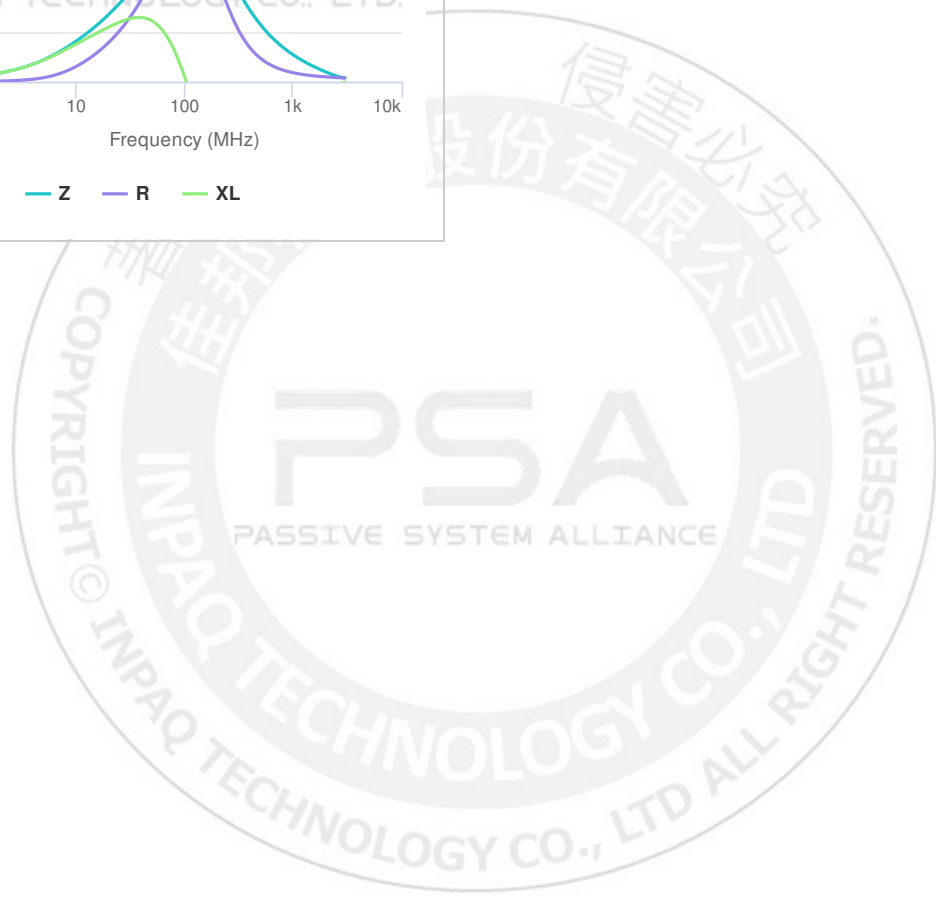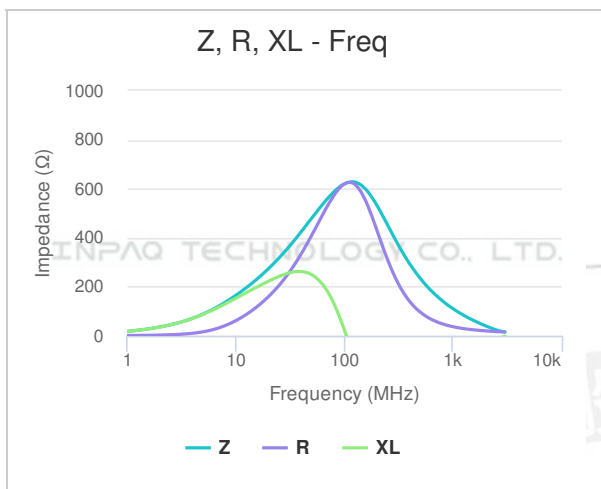

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。