



WFI2520FS1R8_

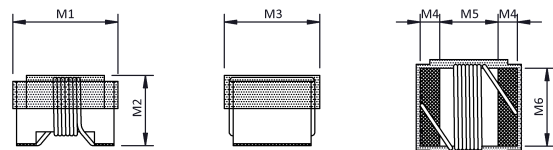

Appearance & Shape

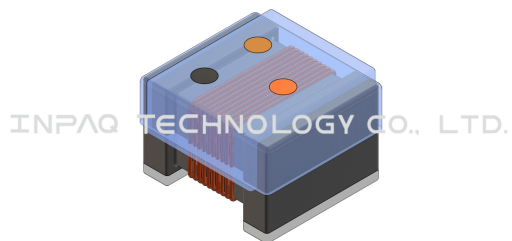

INPAQ TECHNOLOGY CO., LTD.

Unit:mm

Series	M1	M2	M3	M4	M5	M6
WFI2520FS	2.92 MAX.	1.83±0.2	2.59±0.2	0.50±0.1	1.51±0.1	2.03±0.1

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Specification

L size(mm)	2.92(Max)
W size(mm)	2.59±0.2
T size(mm)	1.83±0.25
Size code inch (mm)	1008/2520
Inductance(uH)	1.8
Tolerance	J(±5%),K(±10%)
Test Frequency(MHz)	7.9
DCR(Ω) Max.	0.84
Irms(mA) Max.	600
Q Value (Min.)	39
SRF[MHz]Min.	170
OperatingTemperature range(including self-temperature rising) °C	-25~+125

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Notices

- 1.1. Ferrite core wire wound construction.
- 1.2. High Reliability due to wire wound type construction.
- 1.3. Inductance values from 0.047 to 22 μ H.
- 1.4. Application for DC power line.

Packing


Packing Reel(Inch)	Carrier Tape	Standard package quantity(KPCS)	Piece weight(gram)	MSL Level
7	Plastic type	2	0.0363	1

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/5

- 1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
- 2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。


Characteristic curve

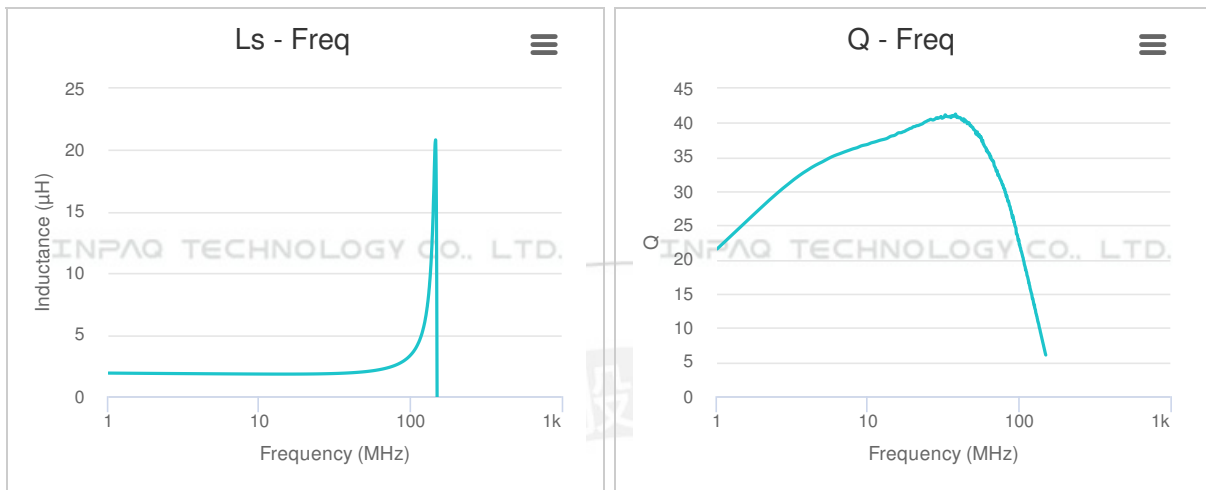

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

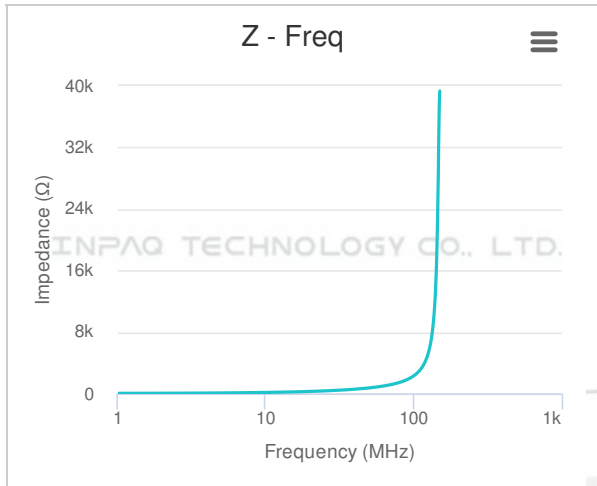

注意 NOTICE: All Specifications are subject to change without notice.

Page 5/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。