



# MCM3216B900HBE

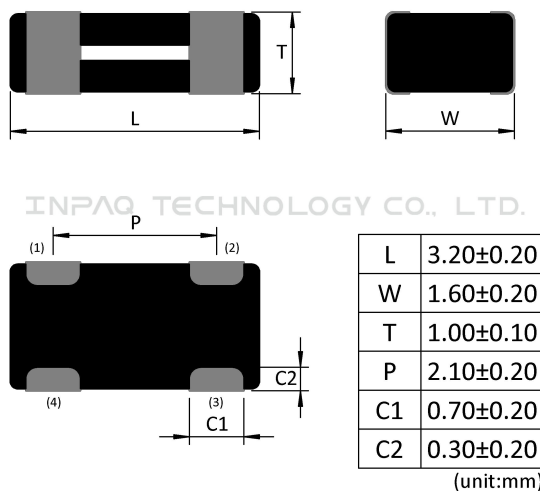

## Appearance & Shape

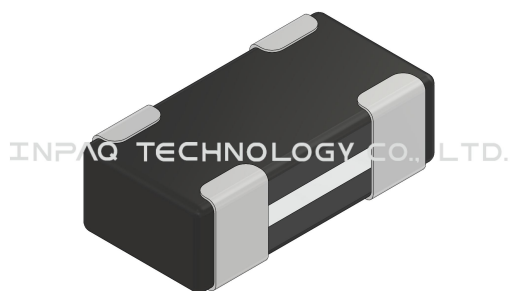

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Specification

|                                                                   |            |
|-------------------------------------------------------------------|------------|
| L size(mm)                                                        | 3.20±0.20  |
| W size(mm)                                                        | 1.60±0.20  |
| T size(mm)                                                        | 1.00±0.10  |
| Size code Inch(mm)                                                | 1206(3216) |
| Impedance(Ω)                                                      | 90         |
| Tolerance(%)                                                      | ±25        |
| Test Frequency(MHz)                                               | 100        |
| DCR(Ω) Max.                                                       | 0.5        |
| I <sub>rms</sub> (mA) Max.                                        | 500        |
| Rated Voltage(V)                                                  | 10         |
| Withstand Voltage(V)                                              | 25         |
| Insulation Resistance (MΩ) Min.                                   | 200        |
| Operating Temperature range(including self-temperature rising) °C | -40~+85    |

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Notices

- Powerful components with composite co-fired material to solve EMI problem for high speed differential signal transmission line as USB, and LVDS, without distortion to high speed signal transmission.

## Packing

| Packing Reel(Inch) | Packaging type | Standard package quantity(PCS) | Piece weight(gram) | MSL Level |
|--------------------|----------------|--------------------------------|--------------------|-----------|
| 7                  | Plastic type   | 3000                           | 0.0267             | 1         |


注意 NOTICE: All Specifications are subject to change without notice.

Page 3/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。

2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Characteristic curve

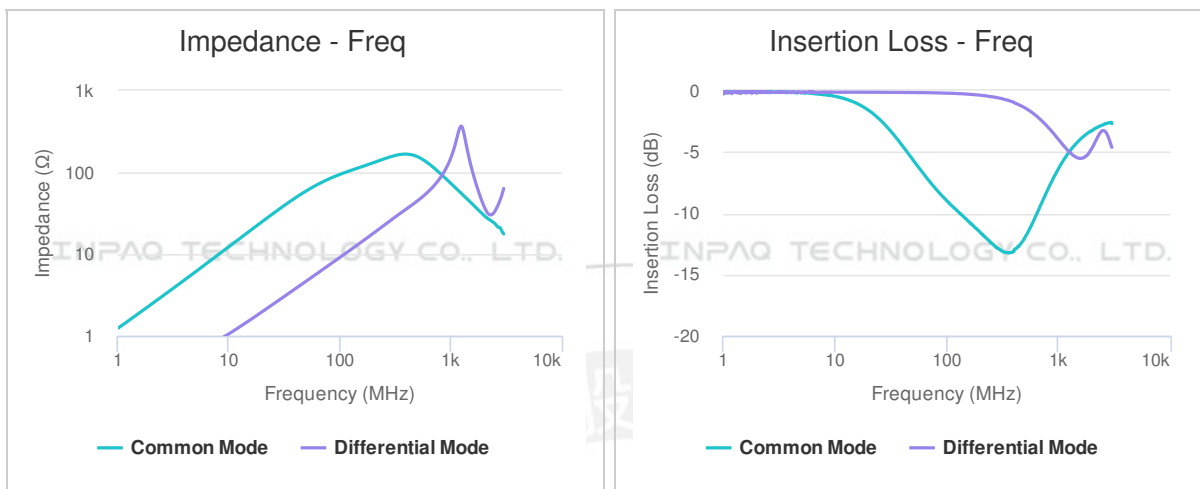

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。