


# MCI1005HZ4N3\_HBP



## Appearance & Shape

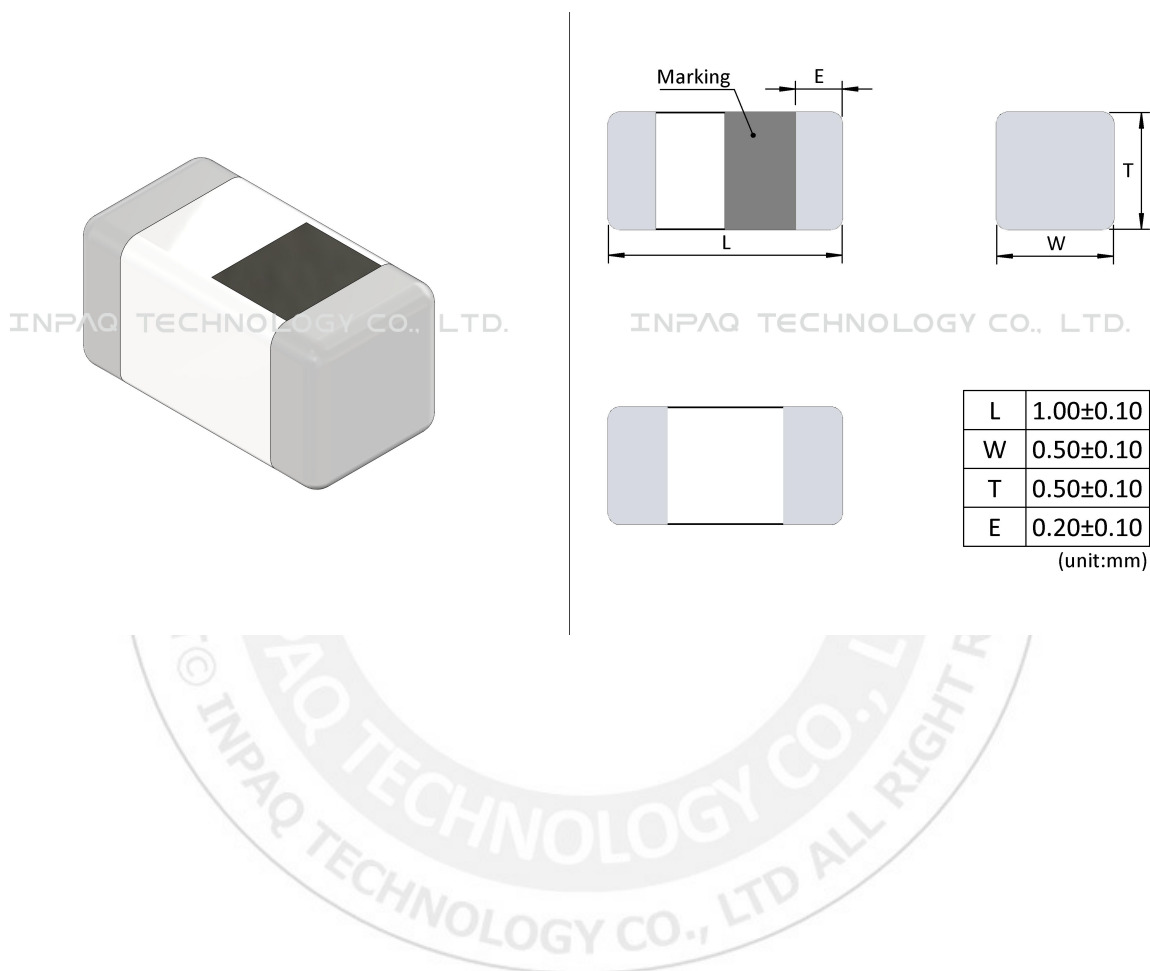

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Specification

|                                                                   |                                 |
|-------------------------------------------------------------------|---------------------------------|
| L size(mm)                                                        | 1.0±0.10                        |
| W size(mm)                                                        | 0.5±0.10                        |
| T size(mm)                                                        | 0.5±0.10                        |
| Size code Inch(mm)                                                | 0402(1005)                      |
| Inductance(nH)                                                    | 4.3                             |
| Tolerance                                                         | B(±0.1nH), C(±0.2nH), S(±0.3nH) |
| Test Frequency(MHz)                                               | 100                             |
| DCR(Ω) Max.                                                       | 0.2                             |
| I <sub>rms</sub> (mA) Max.                                        | 700                             |
| Q Value (Min.)                                                    | 8                               |
| SRF(MHz) Min.                                                     | 6000                            |
| Operating Temperature range(including self-temperature rising) °C | -55~+125                        |

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## Notices

- Particular ceramic material and coil structure provide high frequency application range up to 10GHz.
- Small size and low profile.
- Available in various sizes.
- Excellent solderability and heat resistance.

## Packing


| Packing Reel(Inch) | Packaging type | Standard package quantity(PCS) | Piece weight(gram) | MSL Level |
|--------------------|----------------|--------------------------------|--------------------|-----------|
| 7                  | Paper type     | 10000                          | 0.00069            | 1         |

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。


## Characteristic curve

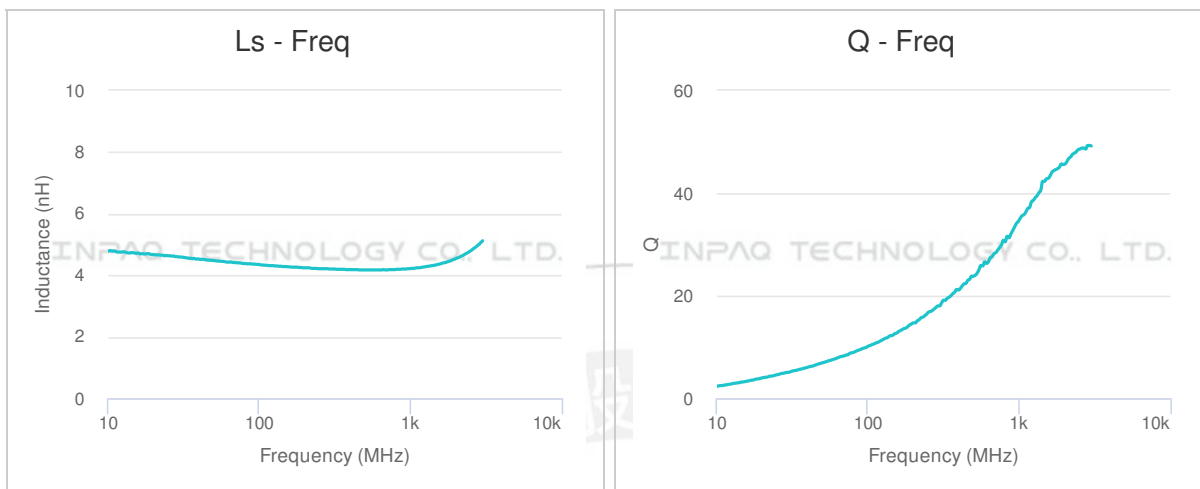

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

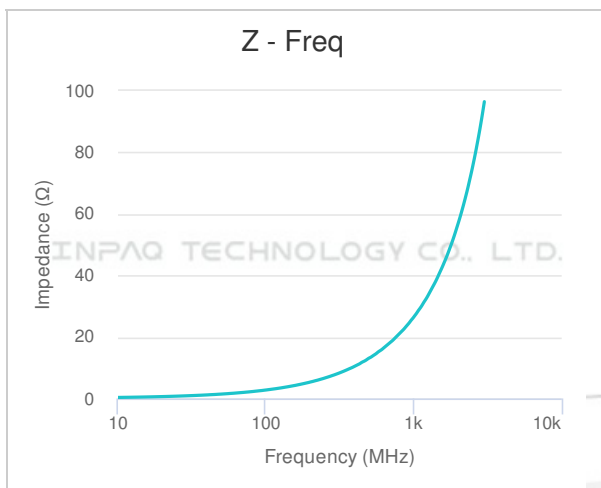

注意 NOTICE: All Specifications are subject to change without notice.

Page 5/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。