


MCM1012B121F06BP



Appearance & Shape

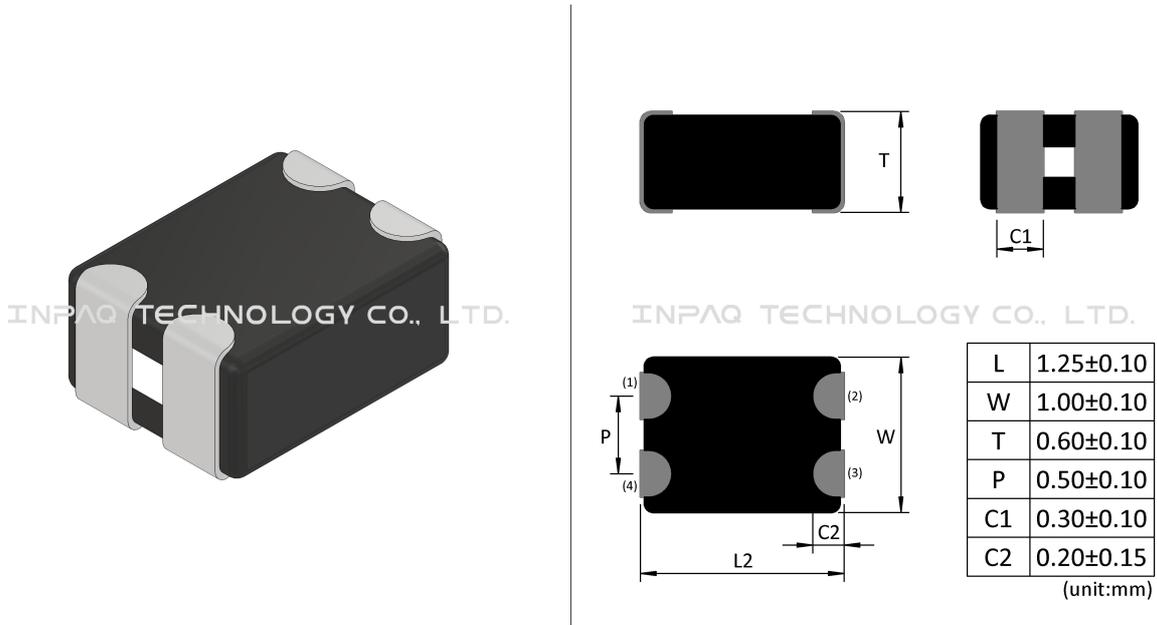

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Specification

L size(mm)	1.25±0.10
W size(mm)	1.00±0.10
T size(mm)	0.60±0.10
Size code Inch(mm)	0504(1210)
Impedance(Ω)	120
Tolerance(%)	±25
Test Frequency(MHz)	100
DCR(Ω) Max.	0.6
I _{rms} (mA) Max.	300
Rated Voltage(V)	10
Withstand Voltage(V)	25
Insulation Resistance (MΩ) Min.	200
Operating Temperature range(including self-temperature rising) °C	-40~+85

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/4


1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

🔗 Notices

- Powerful components with composite co-fired material to solve EMI problem for high speed differential signal transmission line as USB, and LVDS, without distortion to high speed signal transmission.

🔗 Packing

Packing Reel(Inch)	Packaging type	Standard package quantity(PCS)	Piece weight(gram)	MSL Level
7	Paper type	4000	0.0036	1

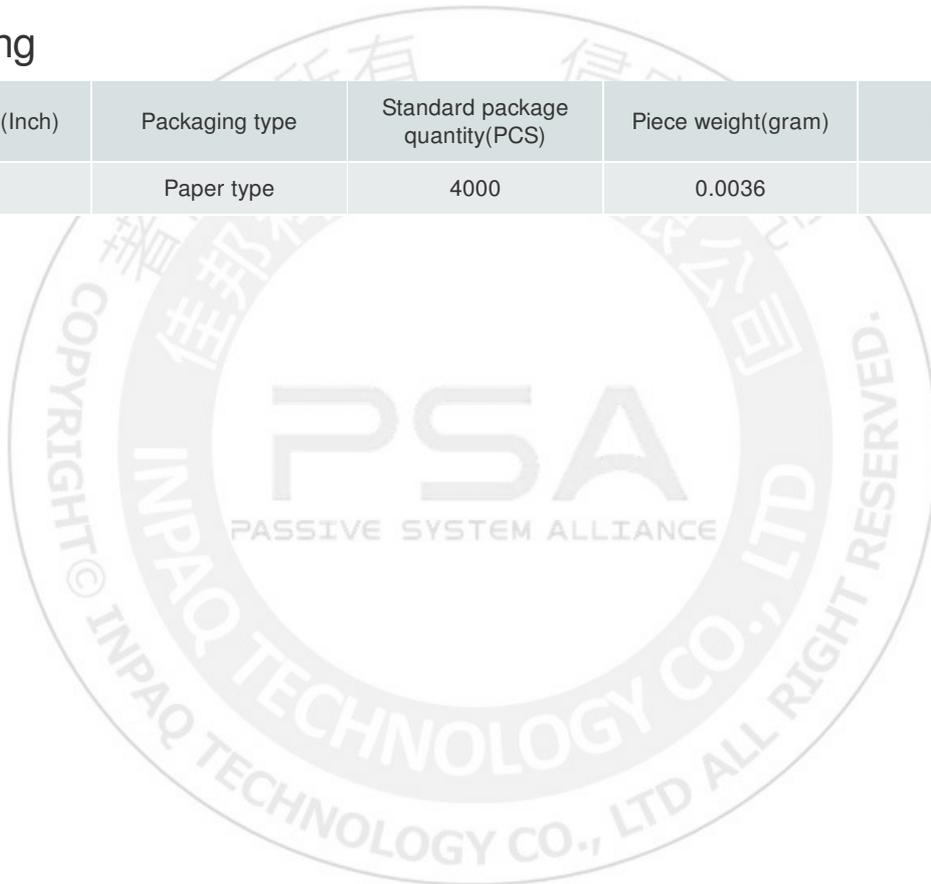


注意 NOTICE: All Specifications are subject to change without notice.

Page 3/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Characteristic curve

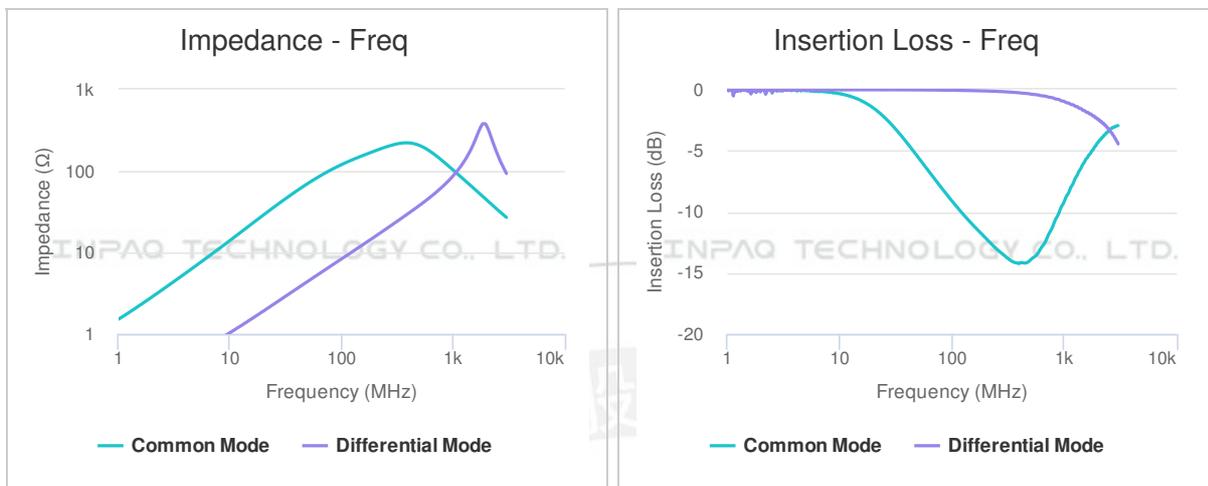

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。