




HCM1012GD500A05P

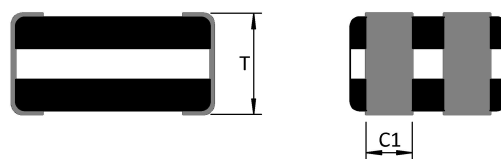

Appearance & Shape

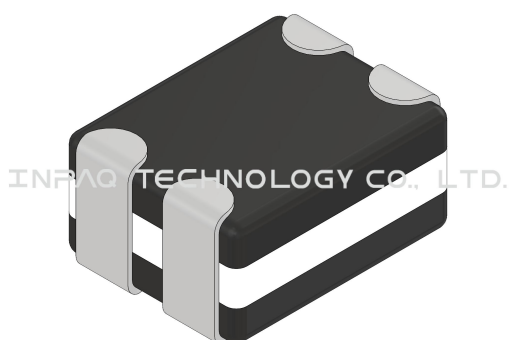

INPAQ TECHNOLOGY CO., LTD.



L	1.25±0.10
W	1.00±0.10
T	0.50±0.10
P	0.55±0.10
C1	0.30±0.10
C2	0.20±0.15

(unit:mm)

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Specification

L size(mm)	1.25±0.10
W size(mm)	1.00±0.10
T size(mm)	0.50±0.10
Size code Inch(mm)	0504(1210)
Impedance(Ω)	50
Tolerance(%)	±25
Test Frequency(MHz)	100
DCR(Ω) Max.	1.5
I _{rms} (mA) Max.	100
Rated Voltage(Vac)	10
Insulation Resistance (MΩ) Min.	100
Operating Temperature range(including self-temperature rising) °C	-40~+85

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Notices

- Ultra High Speed Chip Common Mode Filter, HCM series adopts internally unique multilayer ceramic/ferrite co-firing technologies and higher cut-off frequency design for miniaturized size of EMI filter product development. for higher speed I/O of tablet PC/NB & MB

Packing

Packing Reel(Inch)	Packaging type	Standard package quantity(PCS)	Piece weight(gram)	MSL Level
7	Paper type	4000	0.0025	1


注意 NOTICE: All Specifications are subject to change without notice.

Page 3/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。

2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Characteristic curve

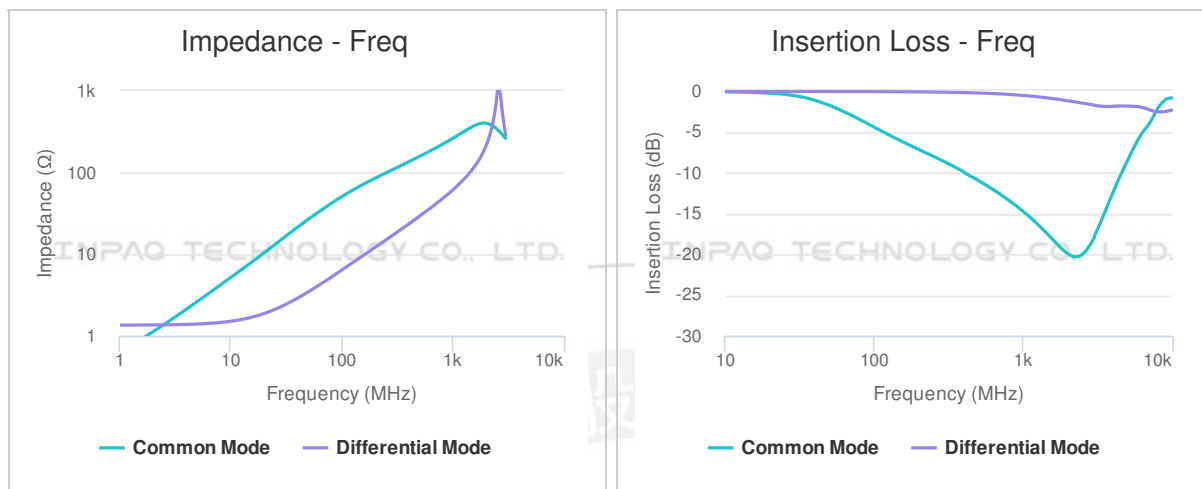

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。