

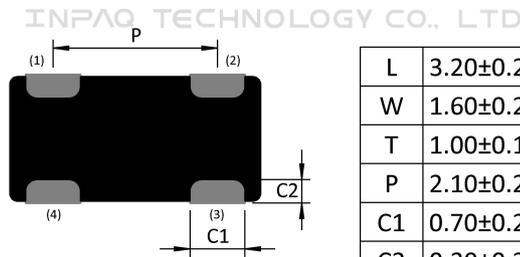


MCM3216B121HBE

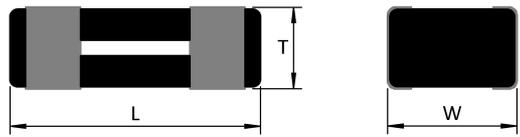

Appearance & Shape

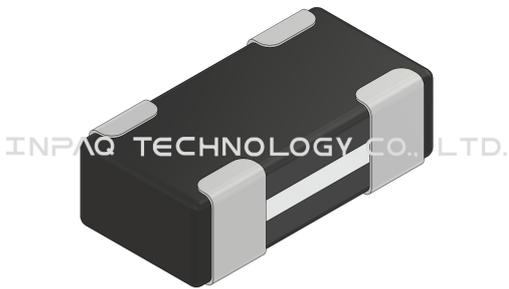

| | |
|----|-----------|
| L | 3.20±0.20 |
| W | 1.60±0.20 |
| T | 1.00±0.10 |
| P | 2.10±0.20 |
| C1 | 0.70±0.20 |
| C2 | 0.30±0.20 |

(unit:mm)



注意 NOTICE: All Specifications are subject to change without notice.

Page 1/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Specification

| | |
|---|------------|
| L size(mm) | 3.20±0.20 |
| W size(mm) | 1.60±0.20 |
| T size(mm) | 1.00±0.10 |
| Size code Inch(mm) | 1206(3216) |
| Impedance(Ω) | 120 |
| Tolerance(%) | ±25 |
| Test Frequency(MHz) | 100 |
| DCR(Ω) Max. | 0.5 |
| I _{rms} (mA) Max. | 500 |
| Rated Voltage(V) | 10 |
| Withstand Voltage(V) | 25 |
| Insulation Resistance (MΩ) Min. | 200 |
| Operating Temperature range(including self-temperature rising) °C | -40~+85 |

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/4


1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Notices

- Powerful components with composite co-fired material to solve EMI problem for high speed differential signal transmission line as USB, and LVDS, without distortion to high speed signal transmission.

Packing

| Packing Reel(Inch) | Packaging type | Standard package quantity(PCS) | Piece weight(gram) | MSL Level |
|--------------------|----------------|--------------------------------|--------------------|-----------|
| 7 | Plastic type | 3000 | 0.0267 | 1 |

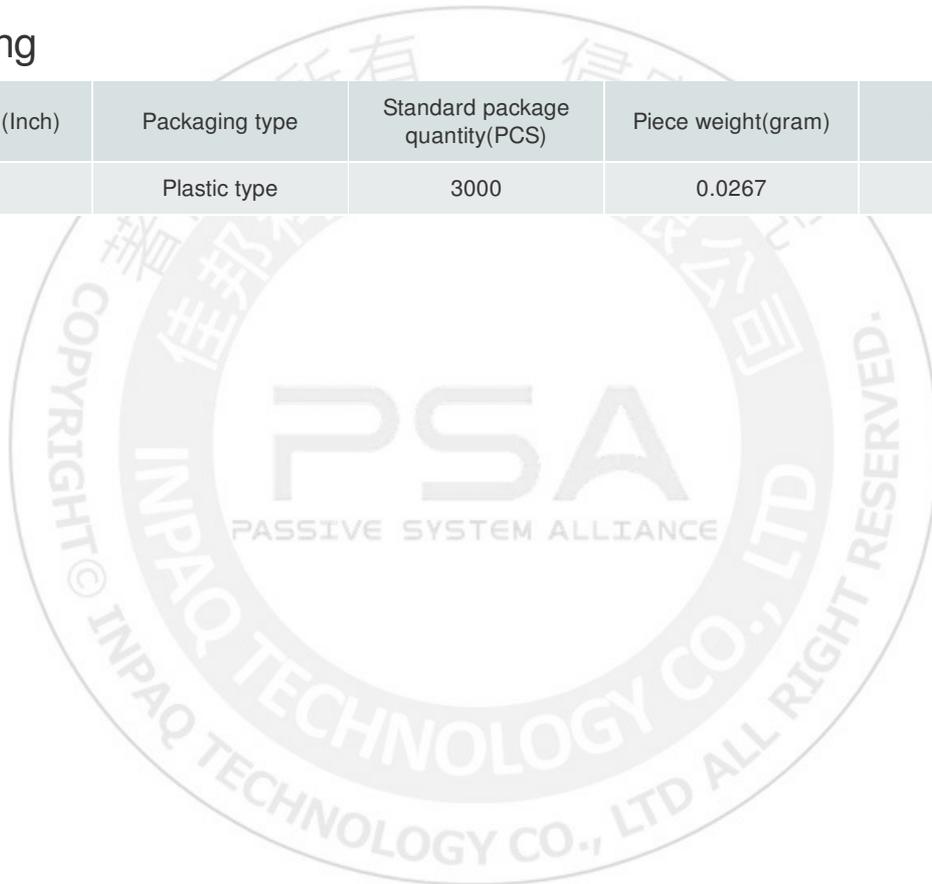


注意 NOTICE: All Specifications are subject to change without notice.

Page 3/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Characteristic curve

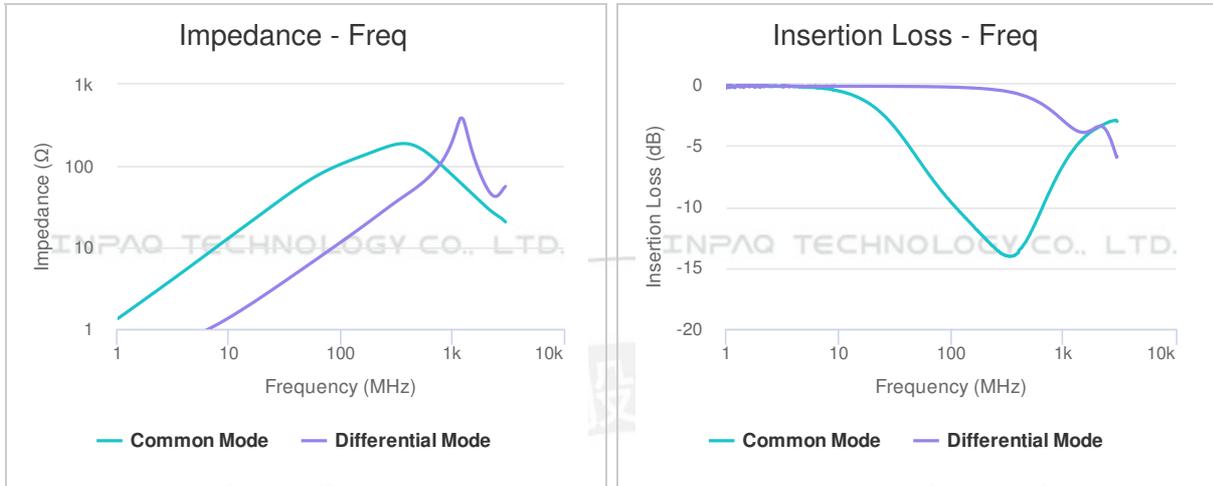

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。