



WFI1608FT100_

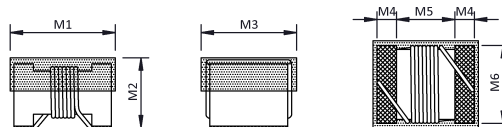

Appearance & Shape



INPAQ TECHNOLOGY CO., LTD.

Series	M1	M2	M3	M4	M5	M6
WFI1608FT	1.65±0.15	1.05±0.15	1.15±0.15	0.35±0.10	0.85±0.10	0.90±0.10

Unit:mm

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Specification

L size(mm)	1.65±0.15
W size(mm)	1.15±0.15
T size(mm)	1.05±0.15
Size code inch (mm)	0603/1608
Inductance(uH)	10
Tolerance	J(±5%),K(±10%)
Test Frequency(MHz)	7.9
DCR(Ω) Max.	4.8
Irms(mA) Max.	270
Q Value (Min.)	19
SRF[MHz]Min.	30
Operating Temperature range(including self-temperature rising) °C	-40~+125

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

Notices

- 1.1. Ferrite core wire wound construction.
- 1.2. High Reliability due to wire wound type construction.
- 1.3. Inductance values from 0.047 to 10 μ H.
- 1.4. Application for DC power line.

Packing


Packing Reel(Inch)	Carrier Tape	Standard package quantity(KPCS)	Piece weight(gram)	MSL Level
7	Plastic type	4	0.005932	1

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。


Characteristic curve

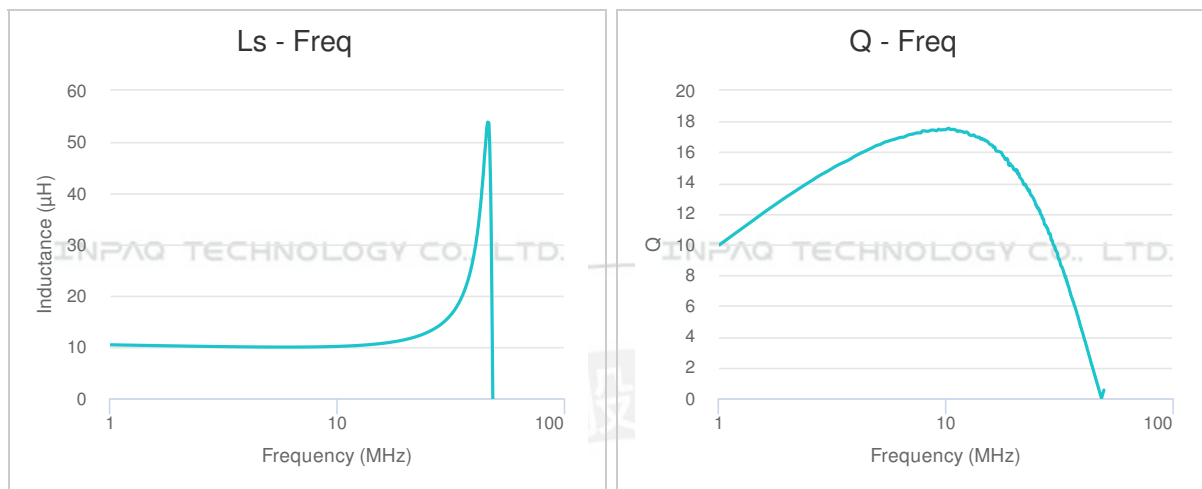

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

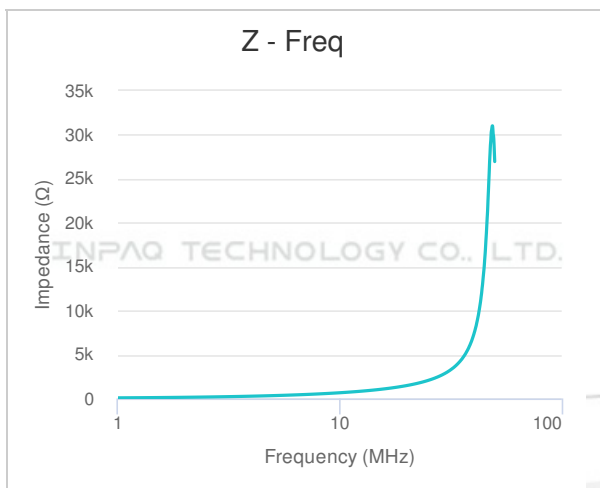

注意 NOTICE: All Specifications are subject to change without notice.

Page 5/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。