

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

MHC4516S851MBE

General ROHS HF

外观&形状



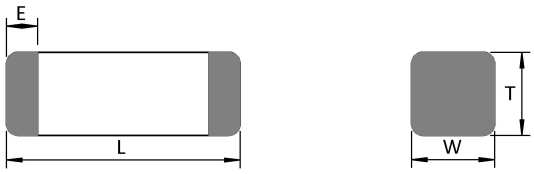

INPAQ TECHNOLOGY CO., LTD.
INPAQ TECHNOLOGY CO., LTD.



L	4.50±0.25
W	1.60±0.20
T	1.60±0.20
E	0.60±0.40

(unit:mm)

© INPAQ TECHNOLOGY CO., LTD ALL RIGHT

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

规格

長(公釐)	4.5±0.25
寬(公釐)	1.6±0.20
高(公釐)	1.6±0.20
尺寸代碼 英吋(公釐)	1806(4516)
阻抗值(Ω)	850
公差(%)	±25
測試頻率(MHz)	100
最大值直流阻抗(Ω)	0.15
最大值溫升電流 at 85℃(mA)	1500
操作溫度 ℃	-55~+125

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

特点

●Combination of high frequency noise suppression with capability of handing high current

●The current rating up to 6 Amps with low DCR

包装讯息


包装尺寸(Inch)	包裝類型	標準包裝(PCS)	單重(gram)	濕敏等級
7	Plastic type	2000	0.059233333333333	1

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

佳邦科技 INPAQ TECHNOLOGY
URL: www.inpaq.com.tw；www.inpaqgp.com TEL:+886-37-585-55 EMAIL:info@inpaq.com.tw

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

特性曲线

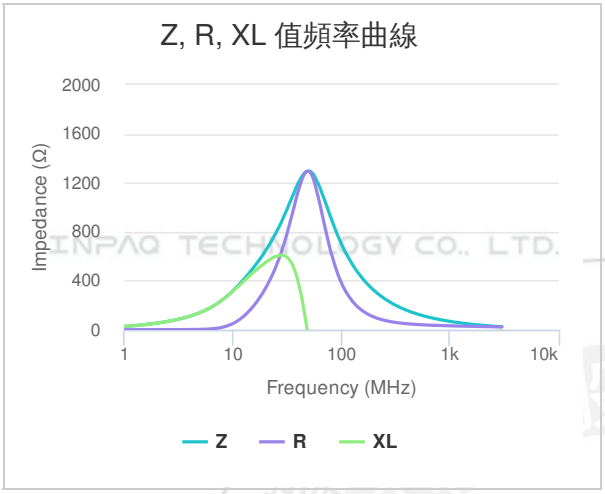

INPAQ TECHNOLOGY CO., LTD.
侵害必究 版權所有 COPYRIGHT© INPAQ TECHNOLOGY CO., LTD ALL RIGHT RESERVED.
PSA PASSIVE SYSTEM ALLIANCE

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。